


SMD Low Profile High Current Molded Inductor Size 1870




- Shielded construction
 - Capable of corresponding high frequency.
 - Low loss realized with low DCR.
 - High performance (Isat) realized by metal dust core.
 - Ultra low buzz noise, due to composite construction.
 - 100% Lead(Pb)-Free and RoHS compliant.
 - AEC-Q200 qualified
 - Operating temperature: -55 to +155 °C(including self-temperature rise)
 - Quantity: 200PCS
-
- Noise filter for various drive circuitry requiring high temp. operation and peak current handling capability
 - Boost-Converter
 - Buck-Converter DC/DC

Dimensions: [mm]

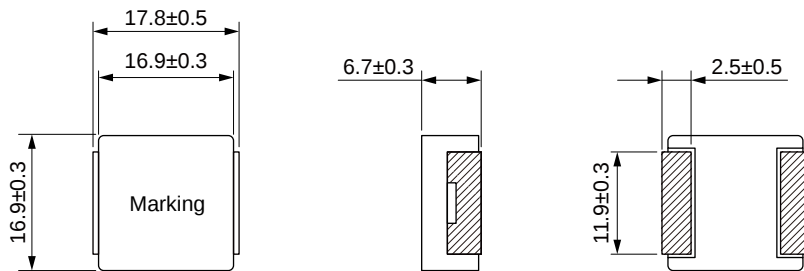

Land Pattern: [mm]



Electrical Properties:


	(μH)			Saturation	(mΩ)	(mΩ)
MDSA1870-1R0M	1.00	±20%	45.0	48.0	1.20	1.40
MDSA1870-1R5M	1.50	±20%	38.0	45.0	1.60	1.90
MDSA1870-2R2M	2.20	±20%	31.0	34.0	2.00	2.50
MDSA1870-3R3M	3.30	±20%	29.0	31.0	3.00	3.80
MDSA1870-4R7M	4.70	±20%	27.0	28.0	4.00	5.00
MDSA1870-6R8M	6.80	±20%	23.0	24.0	6.50	7.80
MDSA1870-100M	10.0	±20%	20.0	21.0	10.0	11.5
MDSA1870-150M	15.0	±20%	15.0	15.0	13.5	16.5
MDSA1870-220M	22.0	±20%	13.0	13.0	21.5	25.0
MDSA1870-330M	33.0	±20%	11.5	11.5	33.0	38.0
MDSA1870-470M	47.0	±20%	9.0	9.0	41.0	48.0
MDSA1870-680M	68.0	±20%	7.8	8.1	68.0	78.0
MDSA1870-820M	82.0	±20%	6.3	7.8	71.0	85.0

Saturation Current will cause L to drop approximately 30%


Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

Typical Electrical Characteristics:

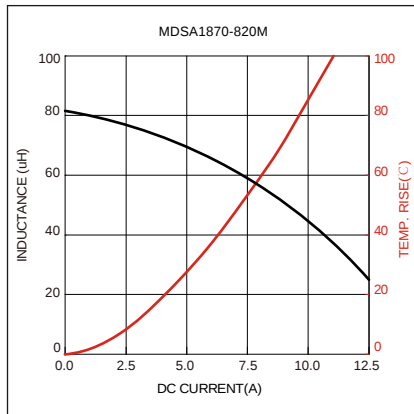

Soldering Reflow:

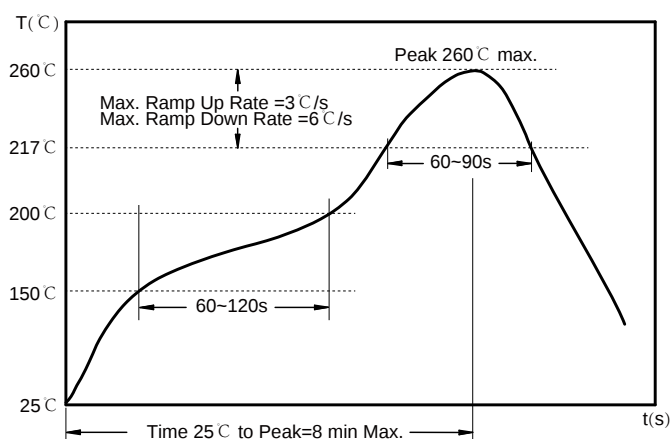

Preheat condition: 150 ~200 °C / 60~120 sec.

Allowed time above 217 °C : 60~90 sec.


Max temperature: 260 °C .

Max time at max temperature: 10 sec.

Allowed Reflow time: 2x max.


Packaging Information:

Tape Dimension :

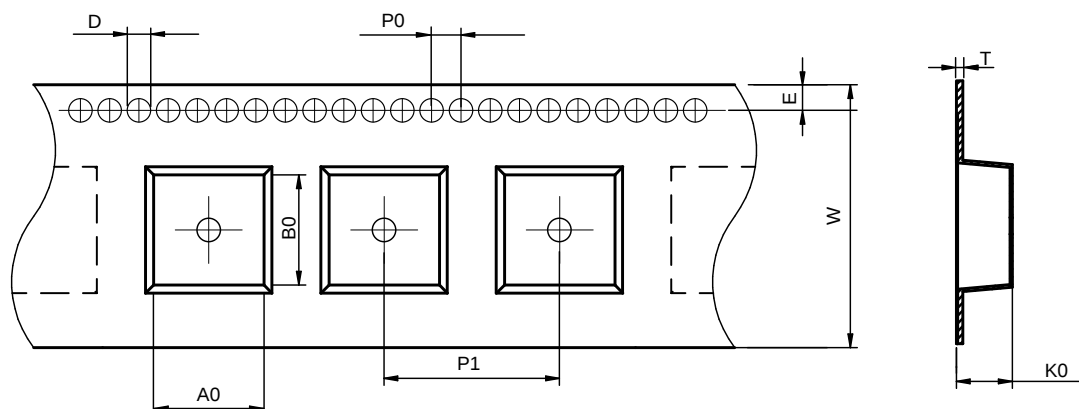

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDSA1870	17.5±0.1	18.1±0.1	1.5±0.1	4.0±0.1	24.0±0.1	32.0±0.3	7.3±0.1	1.75±0.1	0.50±0.05

Peel force of top cover tape:

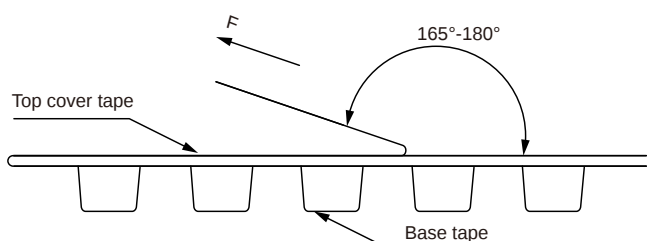


The peel force of top cover tape shall be between 0.1 to 1.3 N


Product Marking:

Marking	KH+Printing (Inductance)
---------	--------------------------

Reel Dimension: [mm]

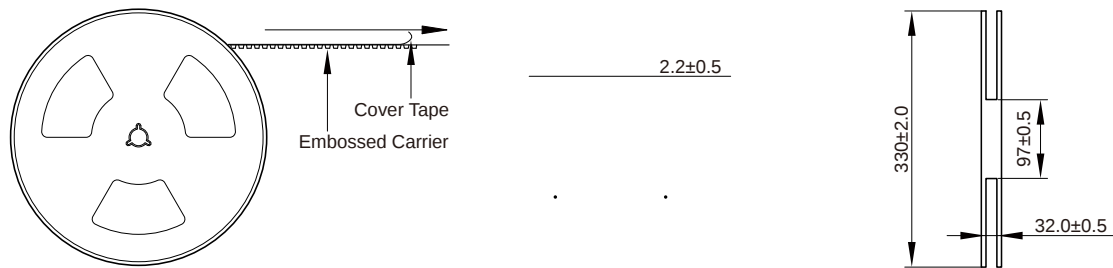

Packaging Quantity:

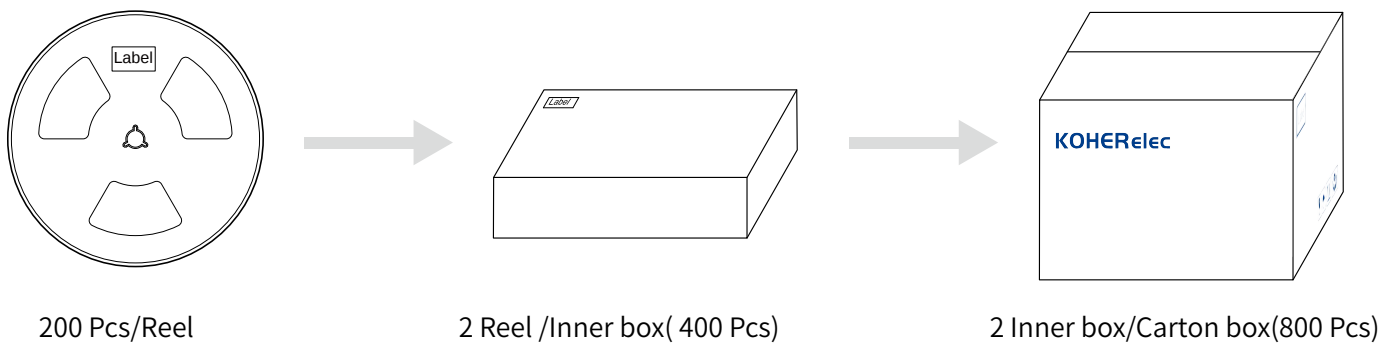

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.